

LUXUS Compact Low Light Camera



The LUXUS Compact Low Light Camera is specially designed for harsh environment diving applications and light ROV systems.

The LUXUS Compact Low Light Camera offers excellent performance in conditions where light is limited and when the use of artificial light is impeded by turbidity. Within such environments, the black and white sensor offers high light sensitivity, image quality and viewing performance.

The camera consumes just 2 W and can handle DC power units from 12 to 24 VDC. The camera is delivered with SubConn® or alternative customer specified connectors.

The LUXUS Compact Low Light Camera is designed to function perfectly in combination with the LUXUS Compact Media Controller and LUXUS brackets and accessories.

The camera housing is made from sandblasted titanium and has a depth rating of 4,000 metres.

Features and benefits


- High performance in turbid environments
- Lightweight
- Compact
- 4,000 m depth rating
- Low light sensitive

Applications

- Diving applications
- General underwater inspection
- Harbour inspection
- Sewer inspection
- ROV systems
- Trencher systems
- Crawler systems
- Tow and drop camera systems
- Benthic sledge systems
- Underwater observatory systems

Options

- A range of lenses
- Alternative connectors
- Custom wiring
- NTSC or PAL
- LUXUS universal mounting bracket
- LUXUS helmet mounting bracket
- LUXUS pistol grip barcket
- LUXUS dovetail bracket
- LUXUS long line diver

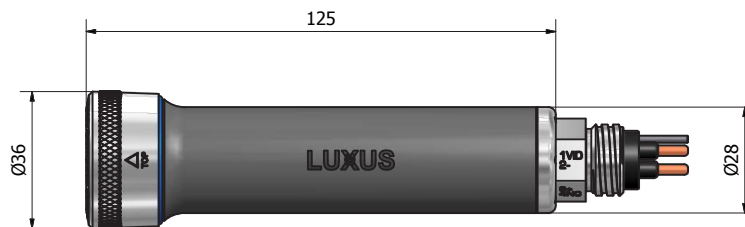

Specifications

Electrical

Power supply:	12 - 24 VDC
Power consumption:	2 W
Output:	Video Composite 1 Vpp
Signal to noise ratio:	>52 dB
Standard wiring:	1 Video hot 2 Power Gnd/screen 3 Power + 4 NC

Mechanical

Material:	Titanium
Standard connector:	SubConn® MCBH4M Ti
Other connectors:	On request
Dimensions:	See drawing (mm)
Weight:	280 g in air 190 g in water
Window/Lens:	Borosilicate glass

Optical

Sensor:	1/3" BW Exview HAD CCD
Angle of view (horizontal)	
Air:	Standard 120°
Water:	Standard 90° (Other angles optional)
Sensitivity:	0.005 lux
Min. focus distance:	10 cm
Zoom:	No
Iris:	No
Focus:	No
TV lines:	600

Environmental

Depth rating:	4,000 m
Test pressure:	600 bar
Storage temperature:	-30 to +70 °C
Operating temperature:	-10 to +50 °C